



for (v=0; v<V; v++) // temporal
 for (f=0; f<F; f++) // spatial
 for (n=0; n<N; n++) // temporal
 $h_{v,f}^{\text{layer}} += h_{n,f}^{\text{layer}}$

Dataflow: ($V_t \{F_s N_t\}$)

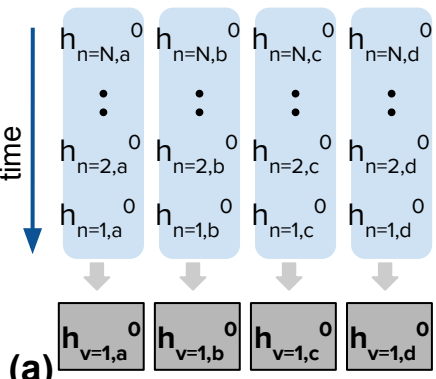


for (v=0; v<V; v++) // temporal
 for (n=0; n<N; n++) // spatial
 for (f=0; f<F; f++) // temporal
 $h_{v,f}^{\text{layer}} += h_{n,f}^{\text{layer}}$

Dataflow: ($V_t \{N_s F_t\}$)

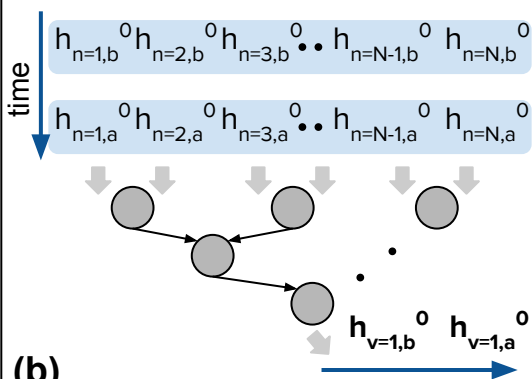


Feature Notation: $h_{(\text{vertex}, \text{feature})}^{\text{layer}}$

Note: n is the neighbor vertex of the accumulating vertex

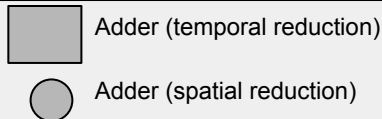


for (v=0; v<V; v++) // spatial
 for (g=0; g<G; g++) // spatial
 for (f=0; f<F; f++) // temporal
 $h_{v,f}^{\text{layer}} += h_{n,f}^{\text{layer}}$

Dataflow: ($\{V_s G_s F_t\}$)

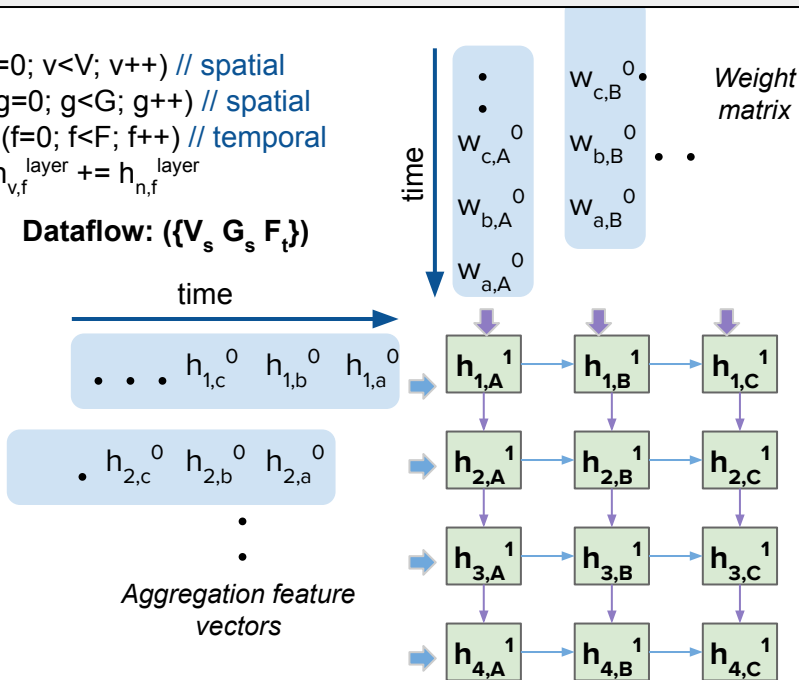

Weight Notation: $w_{(\text{in feature}, \text{out feature})}^{\text{layer}}$



Note: label inside MAC unit is technically still intermediate output (as it still needs to go through activation & normalization)