

Speech Emotion Recognition from raw audio signal using fusion model

XiaoHui Zhang

Task

- Speech Emotion Recognition

Introduction


- Humans express emotions through multi-modal ways
- Emotion Recognition using multi-modal features
- Audio, Text, Video, EEG and so on.
- The result of Pepino shows that multi-modal system leads to significant improvement of approximately 16% on IEMOCAP and MSP-POSCAST.

Challenges

- Small differences in characteristics of different emotions
- Average unweighted accuracy rates usually about 70%~80% on the most realistic datasets.

Methods

- To learn more useful information from raw signals, we utilize a Sinc-filter layer to custom filter banks from speech audio.

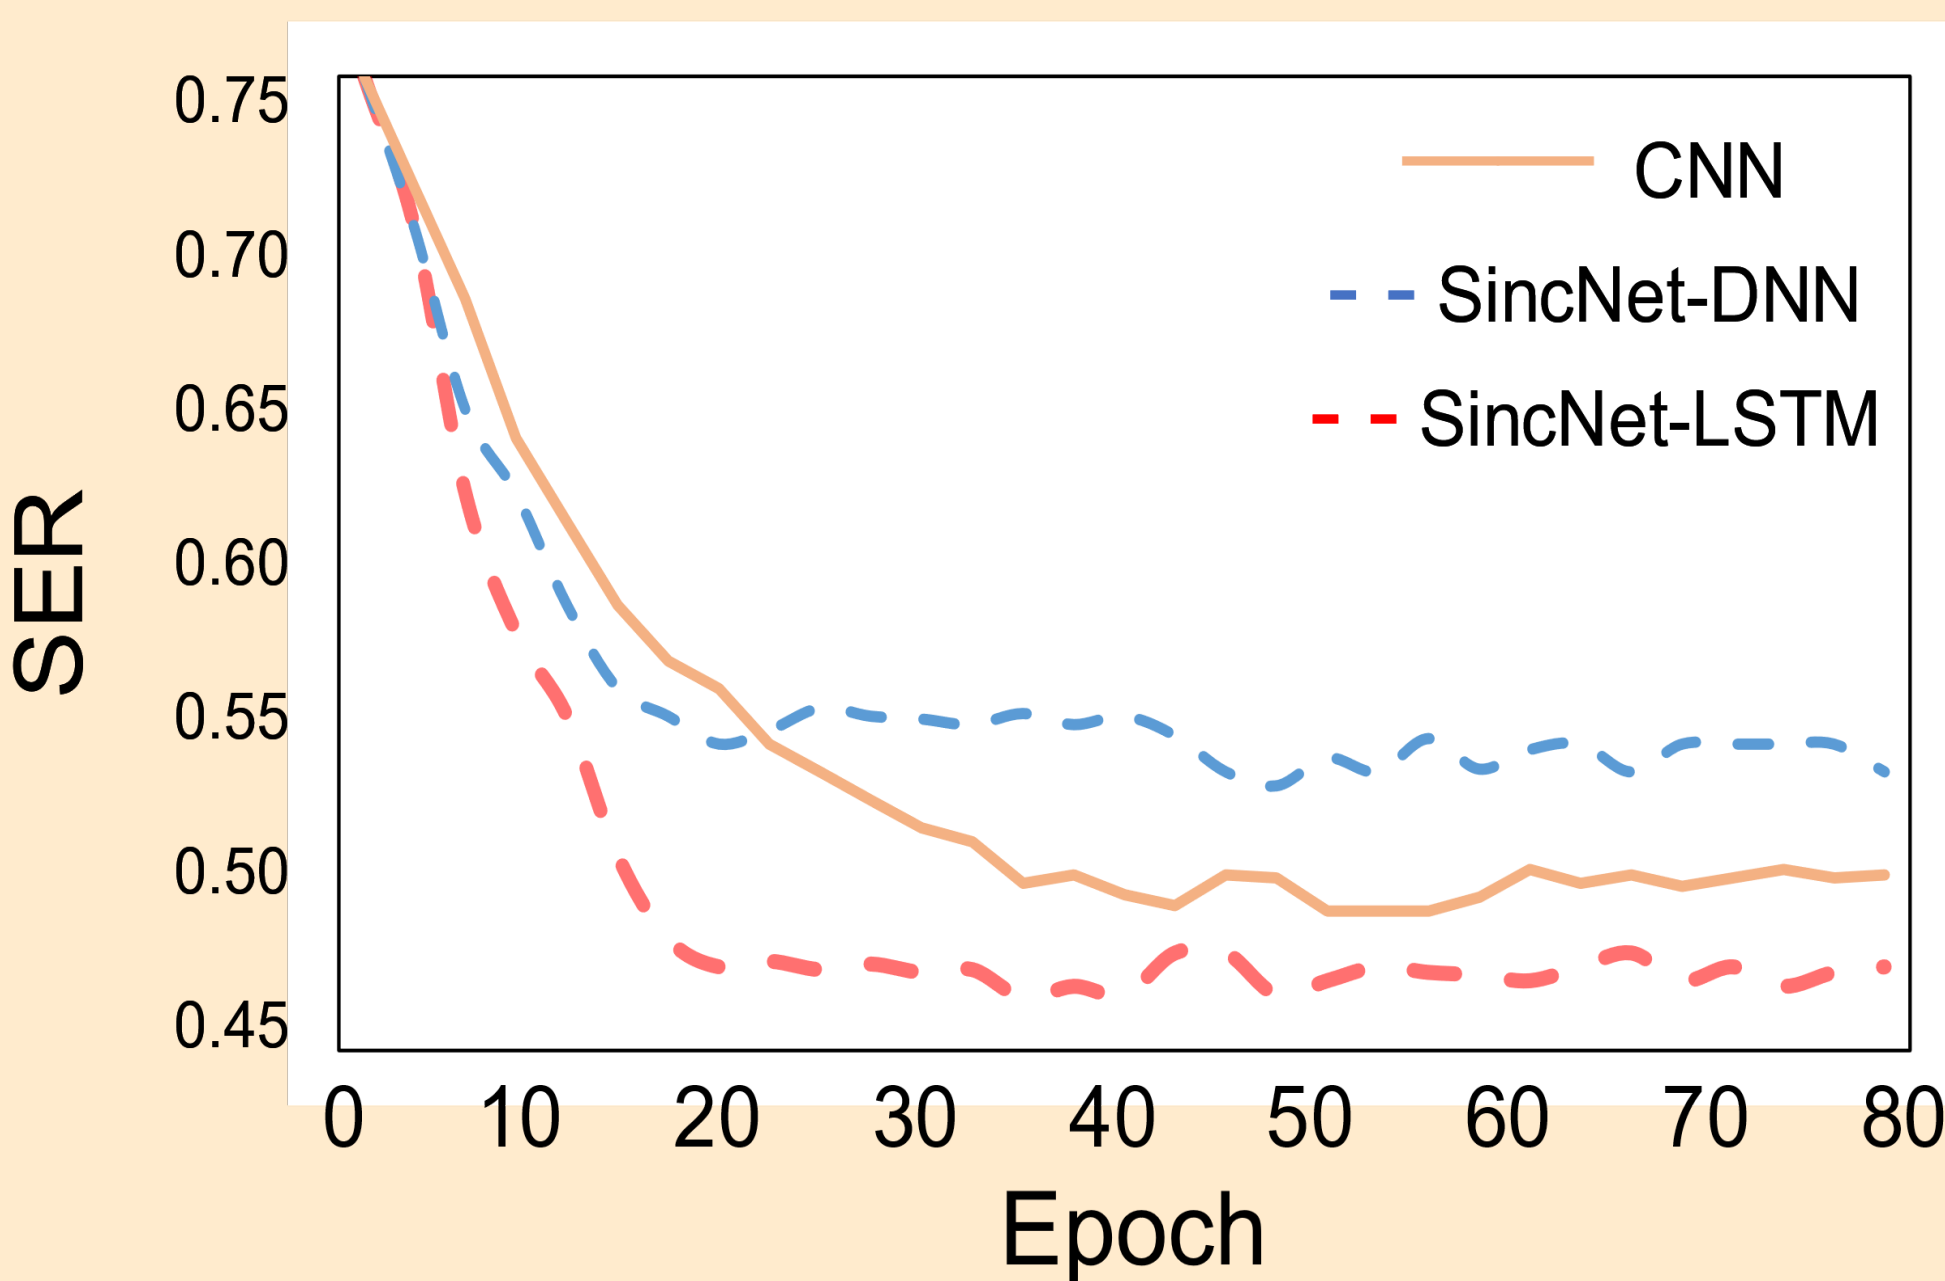

The Sentence Error Rate of CNN, SincNet-DNN and SincNet-LSTM over various training epochs.

- We deploy a self-attention layer on the top of the LSTM, which can assist the model to determine more accurate classification .
- Feature-level fusion is used to fuse linguistic and acoustic features.

Results

Table 1. Performance of different models

Model	Modality	WA(%)	UA(%)
CNN+LSTM	A+L	70.8	69.7
MDRE	A+L	71.8	—
MHA-2	A+L	76.5	77.6
DCNN+BiLSTM	A+L	80.5	79.2
SincNet-DNN+LSTM	A+L	70.1	71.1
SincNet-LSTM+LSTM	A+L	75.3	75.3
IAAN	A	65.2	67.1
TFCNN+DenseCap	A	70.3	70.8
IANN+DED	A	69.0	70.1
SLL+DED	A+L	85.3	85.1

- Both SDL and SLL perform better than CNN+LSTM, which indicates that the multi-modal model using Sinc-conv layer not only has faster convergence than that using CNN, but also has better verification accuracy.
- Base on the SLL, we use DED to classify the predictions, and finally achieves an accuracy rate of 85%.

Conclusion

- We do not use the hand-crafted features that have been used in the standard CNN but use the raw audio append to the Sinc-conv layer, which makes SLL learn more information than the baseline using CNN and LSTM does.
- The performance of DED has achieved a weighted accuracy of 85.29% on the IEMOCAP database, which outperforms the SLL by 9.96% and the fusion model combining DCNN and BiLSTM by 4.78%.

Reference

- D. Priyasad, T. Fernando, S. Denman, S. Sridharan, and C. Fookes, “Attention driven fusion for multi-modal emotion recognition” in *IEEE International Conference on Acoustic, Speech and Signal Processing(ICASSP)*, 2020, pp. 3227-3231
- S.-L. Yeh, Y.-S. Lin, and C.-C. Lee, “A dialogical emotion decoder for speech emotion recognition in spoken dialog,” 2020 *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 6479–6483, 2020.